

READ ME: Meris prEDITOR v4

Welcome to Meris prEDITOR v4

prEDITOR is a desktop editor/librarian compatible with Ottobit X, Enzo X, MercuryX and LVX.

In order for prEDITOR to work properly, you'll need 5 things:


1. Update [Ottobit X](#), [Enzo X](#), [MercuryX](#) and/or [LVX](#) to their latest firmware. Be sure to **unzip** the file first and follow the 'READ ME' file for instruction.
2. Download and install latest prEDITOR app.
3. Solid power supply [9V DC 300 mA] to power your unit and properly sync to prEDITOR
4. USB-C cable or compatible MIDI device or interface [Tested and recommended devices on p.2] Note: Standard MIDI DIN operation is preferred for the lowest noise operation and to prevent audio ground loops.

How to update your firmware:

To enter firmware update mode, press and hold footswitch **1** and **3** before/during powering Enzo X, LVX or MercuryX. Do this until the next screen appears.




The screen will show a Copy File graphic screen.

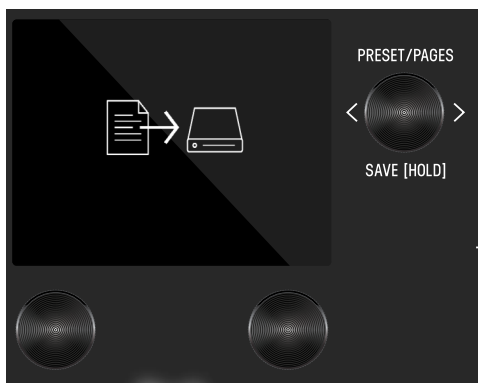

Connect your pedal to your computer via the rear USB C jack. Ottobit X, Enzo X, MercuryX or LVX will appear on your computer as a USB drive. [If the pedal does not mount, try restarting your computer while connected.] Drag and drop the latest firmware image [bin file, NOT zip file] from your computer onto Ottobit X, Enzo X, MercuryX or LVX drive. The screen on the pedal will display a load meter. When the load meter is full and your computer signals that it is done with the copy, properly eject the Ottobit X, Enzo X, MercuryX or LVX drive.

Power Cycle graphic screen will display. Unplug and replug the power from the pedal to complete the update.

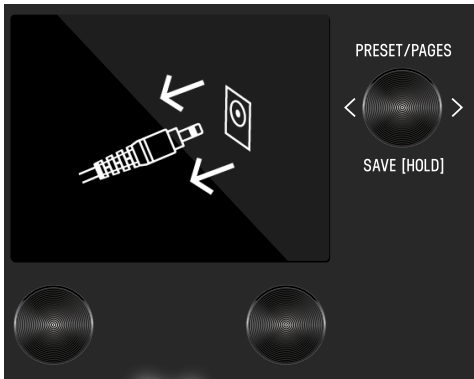

After power cycle is finished, FACTORY RESET is recommended after a backup of presets are made in prEDITOR.

Press and hold **C3** when powering up Ottobit X, Enzo X, MercuryX and/or LVX to enter the Factory Reset View. From the Factory Reset View, **press C1** to start the Factory Reset which resets all presets and globals, or **press C2** to cancel the reset and start the pedal normally.

IMPORTANT NOTE: Be sure to back up your custom presets using prEDITOR. Factory reset will erase all user edits.

Minimum OS Requirements:

MAC – 10.15.7 and above

PC – Windows 10 and above

TESTED MIDI DEVICES

CME U2MIDI Pro

CME U6MIDI Pro

CME C2MIDI Pro

Yamaha MD-BT01

Widi Master Bluetooth

MOTU M4

MOTU MIDI Express 128

Morningstar MC6 PRO

Morningstar MC8

Morningstar MC6 MkII

Strymon Conduit [use Port 5]